

1A


CABLE PULLING GRIPS

with 1 eyelet and 1 integrated thimble (according to DIN)



These cable grips are suitable for all mechanical cable-laying operations with large traction forces.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
K 10/1	6 - 10	2,2	600	700
K 15/1	10 - 15	3,4	600	700
K 20/1	15 - 20	6,8	600	700
K 25/1	20 - 25	6,8	600	700
K 30/1	25 - 30	8,1	1.000	1.100
K 40/1	30 - 40	11,7	1.250	1.350
K 50/1	40 - 50	16,0	1.250	1.350
K 60/1	50 - 60	16,0	1.500	1.600
K 70/1	60 - 70	21,3	1.500	1.650
K 90/1	70 - 90	27,9	1.500	1.650
K 110/1	90 - 110	34,9	1.500	1.650
K 130/1	110 - 130	34,9	1.500	1.700
K 160/1	130 - 160	42,7	1.500	1.700
K 200/1	160 - 200	49,8	1.500	1.700

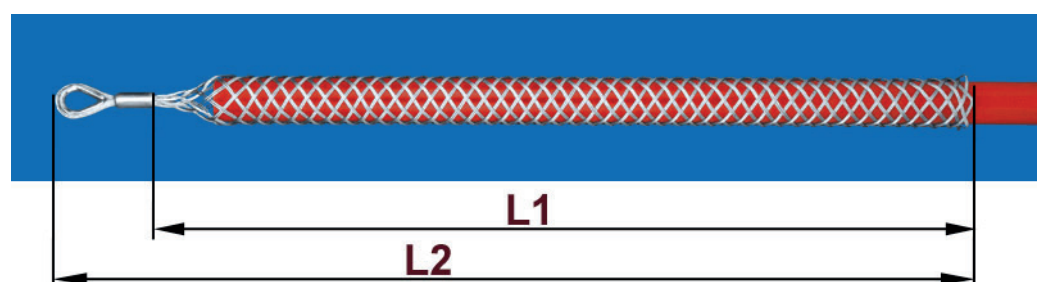

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL