



1C

CABLE PULLING GRIPS FOR INTERIOR INSTALLATION with rotary threaded sleeve

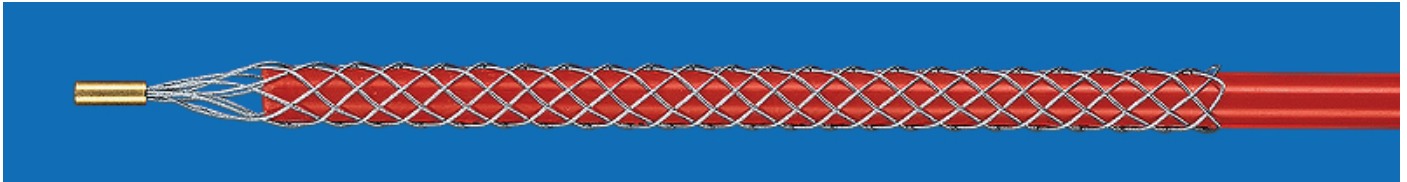

These pulling grips are equipped with a rotary threaded sleeve that can be screwed onto the threaded pin of the “Fibreflex” duct rod (see 6a) with only a few revolutions and in nearly no time.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)	Totale lengte L2 ca. (mm)
J 6/D	4 - 6	0,5	M 5	170	190
J 9/D	6 - 9	0,5	M 5	180	200
J 12/D	9 - 12	0,5	M 5	250	310
J 15/D	12 - 15	0,5	M 5	320	380
J 19/D	15 - 19	0,5	M 5	360	400
J 25/D	19 - 25	0,5	M 5	380	430
J 31/D	25 - 31	0,5	M 5	420	470

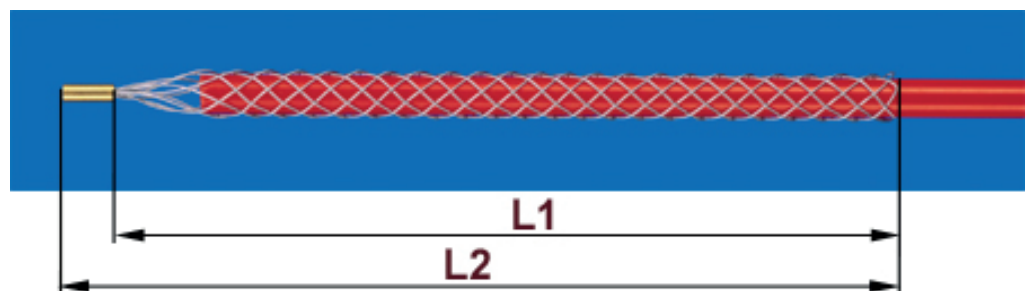

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL