



1D

## CABLE PULLING GRIPS FOR FIBRE OPTICS CABLES with 1 eyelet, without thimble

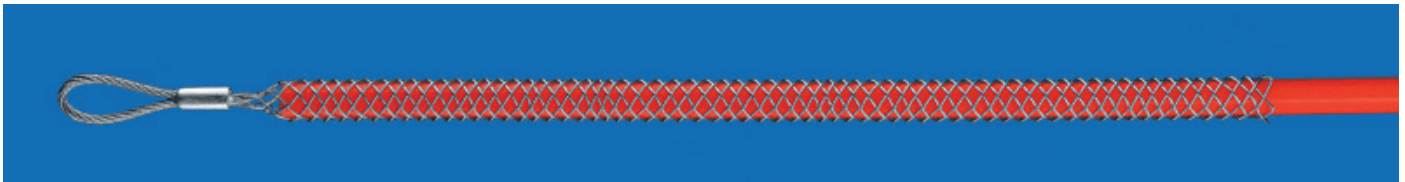

These pulling grips are used for mechanical laying of fibre optics cables into protective cable conduits.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
L 9	6 - 9	1,1	600	670
L 12	9 - 12	1,3	600	670
L 15	12 - 15	2,1	600	670
L 19	15 - 19	2,6	600	700
L 25	19 - 25	4,0	600	710
L 31	25 - 31	5,8	600	730

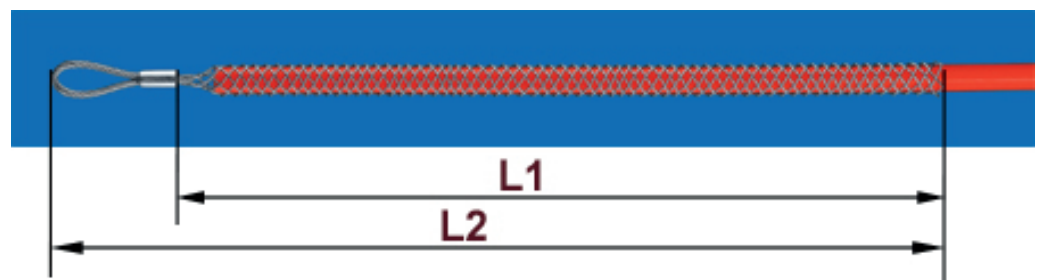

INTERESTED? MAIL US AT [INFO@CABLECONNECTION.NL](mailto:INFO@CABLECONNECTION.NL)