


1E


CABLE PULLING GRIPS FOR 3 SINGLE-CORD CABLES

3 cable grips are joined in 1 ferrule with eyelet, without thimble

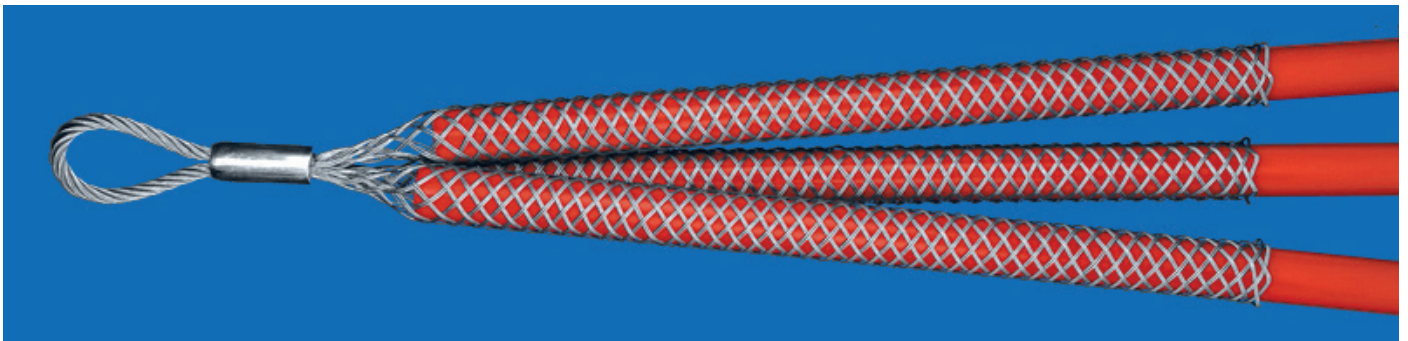

By means of these cable pulling grips 3 single-cord cables can be efficiently laid in one go.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
K 20/3/1	15 - 20	6,8	1.000	1.150
K 25/3/1	20 - 25	6,8	1.000	1.150
K 30/3/1	25 - 30	8,1	1.000	1.150
K 40/3/1	30 - 40	11,7	1.250	1.400
K 50/3/1	40 - 50	16,0	1.250	1.400
K 60/3/1	50 - 60	16,0	1.500	1.650

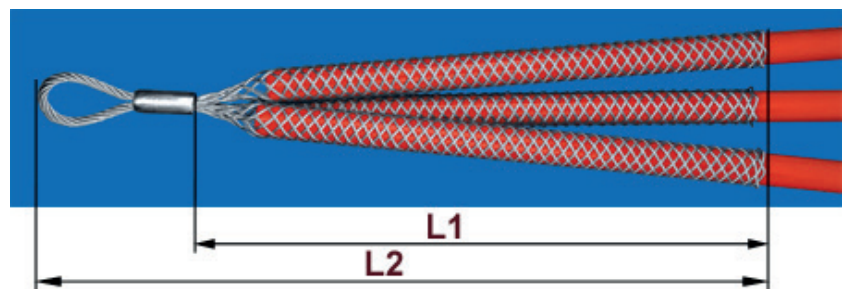

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL