



2A

CABLE PULLING GRIPS WITH 2 EYELETS AND 2 INTEGRATED THIMBLES (according to DIN)

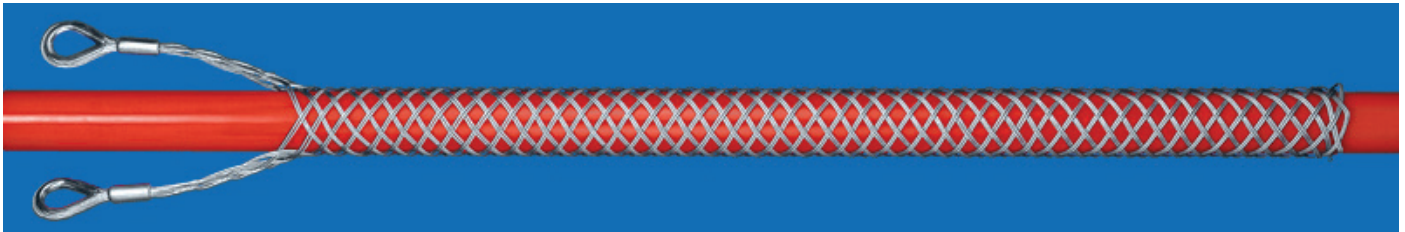

With this kind of cable pulling grips, cables that have already been laid can be pulled further without having to reposition the cable winch. This is an easy way to perform regulating and alignment operations.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
K 10/2	6 - 10	2,2	600	800
K 15/2	10 - 15	3,4	600	800
K 20/2	15 - 20	6,8	600	800
K 25/2	20 - 25	6,8	600	800
K 30/2	25 - 30	8,1	1.000	1.200
K 40/2	30 - 40	11,7	1.250	1.450
K 50/2	40 - 50	16,0	1.250	1.450
K 60/2	50 - 60	16,0	1.500	1.800
K 70/2	60 - 70	21,3	1.500	1.800
K 90/2	70 - 90	27,9	1.500	1.800
K 110/2	90 - 110	34,9	1.500	1.850
K 130/2	110 - 130	34,9	1.500	1.850
K 160/2	130 - 160	42,7	1.500	1.850
K 200/2	160 - 200	49,8	1.500	1.850

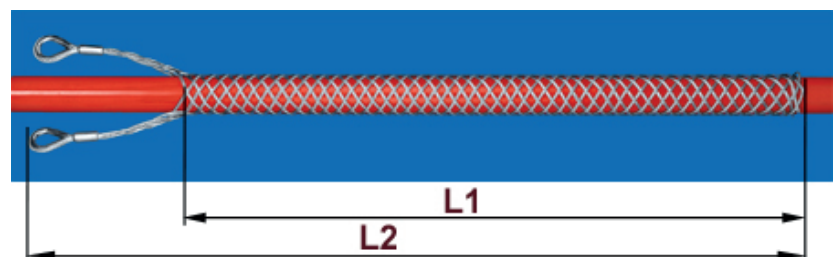

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL