



2B

CABLE PULLING GRIPS WITH 2 EYELETS AND 2 INTEGRATED THIMBLES (according to DIN) longitudinally parted

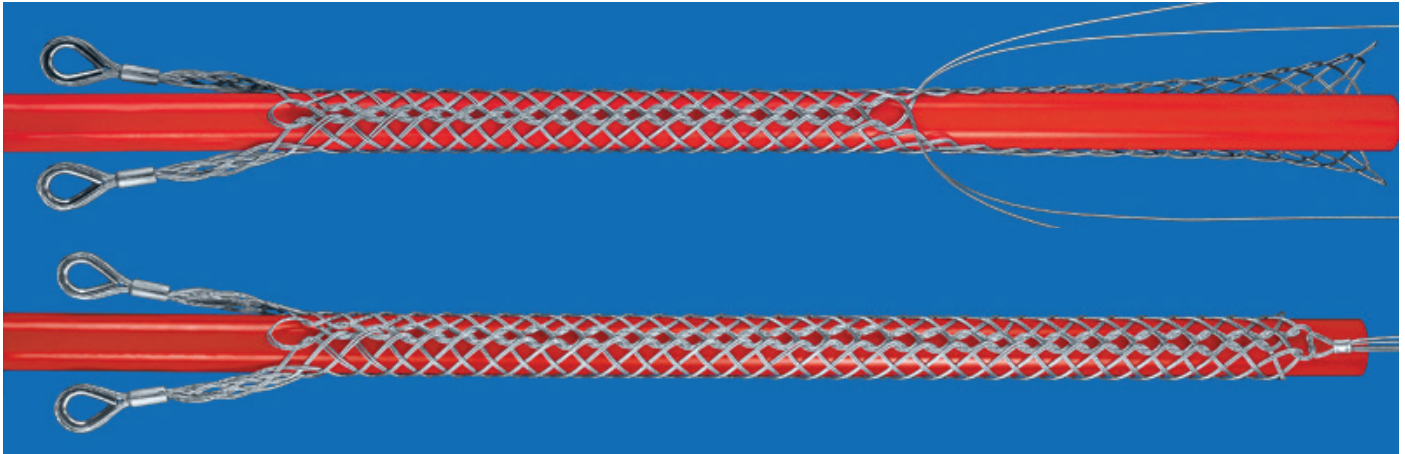

Parted cable pulling grips are used to braid-in cables that have already been laid, without the need of a freely accessible end. This is an easy way to perform regulating and alignment operations.

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
K 10/2/G	6 - 10	2,2	600	800
K 15/2/G	10 - 15	3,4	600	800
K 20/2/G	15 - 20	6,8	600	800
K 25/2/G	20 - 25	6,8	600	800
K 30/2/G	25 - 30	8,1	1.000	1.200
K 40/2/G	30 - 40	11,7	1.250	1.500
K 50/2/G	40 - 50	16,0	1.250	1.500
K 60/2/G	50 - 60	16,0	1.500	1.800
K 70/2/G	60 - 70	21,3	1.500	1.800
K 90/2/G	70 - 90	27,9	1.500	1.800
K 110/2/G	90 - 110	34,9	1.500	1.850
K 130/2/G	110 - 130	34,9	1.500	1.850
K 160/2/G	130 - 160	42,7	1.500	1.900
K 200/2/G	160 - 200	49,8	1.500	1.900

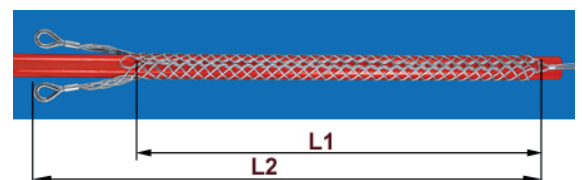

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL