



3A

CABLE MOUNTING GRIPS with 1 side eyelet, without thimble

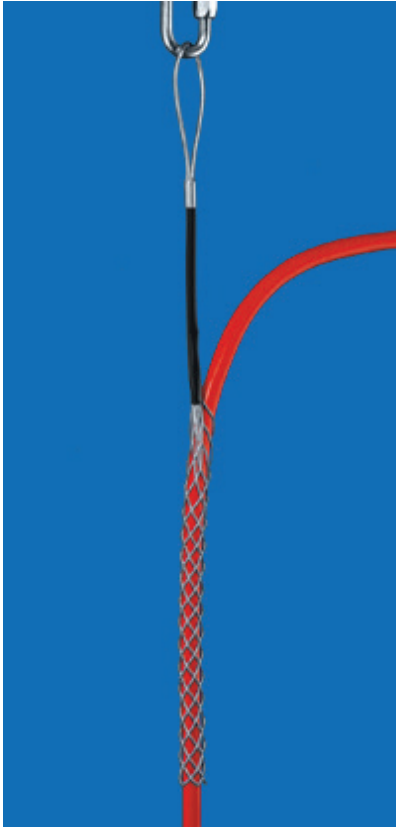

Cable mounting grips are used for protective suspension of cable or hoses in industrial systems, machinery, lifts, vehicles, cable ducts, etc. Localized stresses as might occur with suspension by clamps or saddles are avoided with suspension by cable mounting grips as the mesh distributes the arising forces to a larger area.

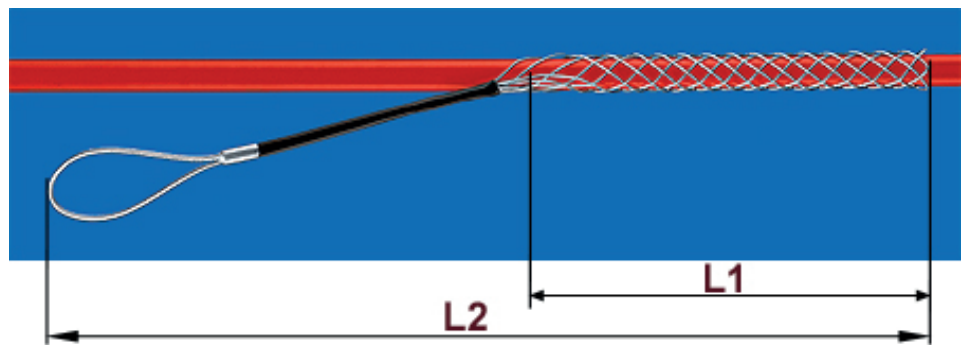

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
M 6/1	4 - 6	0,6	100	275
M 9/1	7 - 9	1,1	120	290
M 12/1	9 - 12	1,3	135	340
M 15/1	12 - 15	2,1	180	390
M 19/1	15 - 19	2,6	220	450
M 25/1	19 - 25	2,6	275	510
M 30/1	25 - 30	4,0	350	610
M 40/1	30 - 40	5,8	370	660
M 50/1	40 - 50	8,0	490	800
M 60/1	50 - 60	8,0	500	810
M 70/1	60 - 70	10,6	520	860
M 90/1	70 - 90	13,9	580	950
M 110/1	90 - 110	17,4	650	1130

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL