



3B

3B CABLE MOUNTING GRIPS WITH 2 SIDE EYELETS without thimble

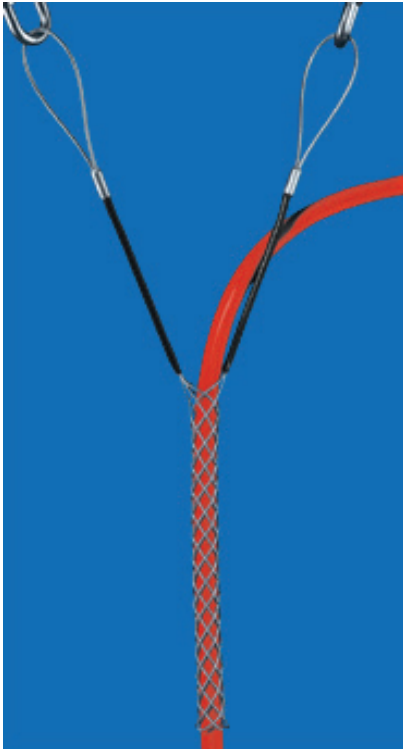

This type of cable mounting grips in general complies with the version with only one side eyelet (see 3a), however it is equipped with two side eyelets, that make it possible for a cable to be suspended exactly vertically.

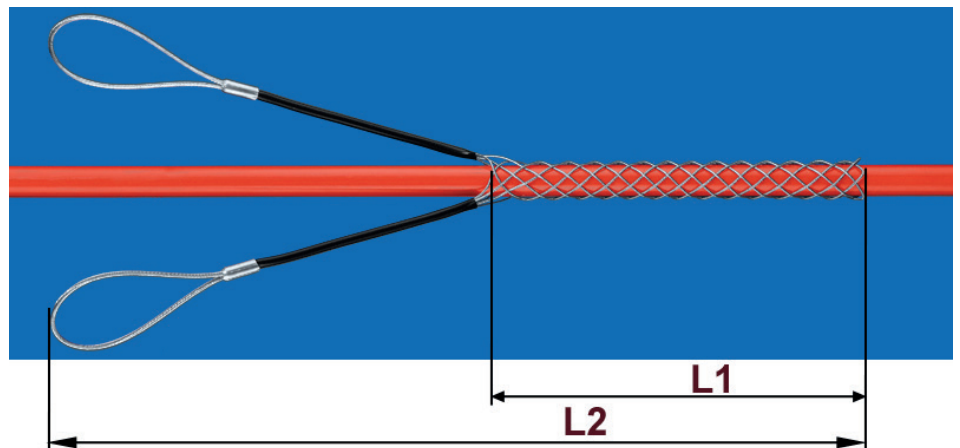

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
M 6/2	4 - 6	0,6	100	285
M 9/2	7 - 9	1,1	120	300
M 12/2	9 - 12	1,3	135	350
M 15/2	12 - 15	2,1	180	400
M 19/2	15 - 19	2,6	220	450
M 25/2	19 - 25	2,6	275	530
M 30/2	25 - 30	4,0	350	630
M 40/2	30 - 40	5,8	370	680
M 50/2	40 - 50	8,0	490	800
M 60/2	50 - 60	8,0	500	840
M 70/2	60 - 70	10,6	520	890
M 90/2	70 - 90	13,9	580	900
M 110/2	90 - 110	17,4	650	1160

INTERESTED? MAIL US AT INFO@CABLECONNECTION.NL