



3C

## CABLE MOUNTING GRIP with 1 side eyelet, without thimble, longitudinally parted, including tying cord

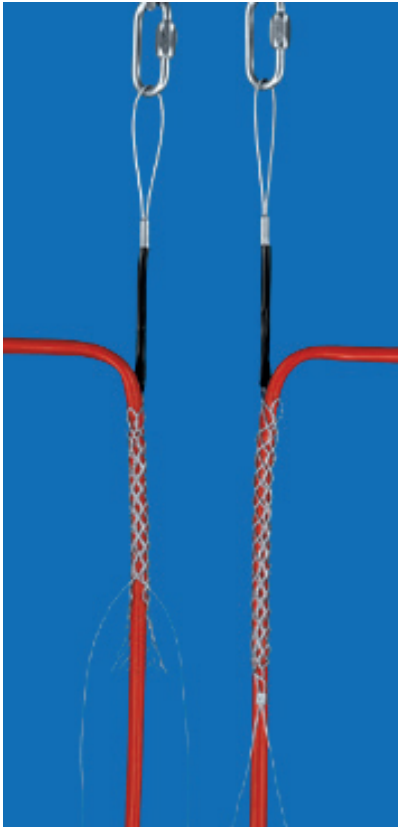

Longitudinally parted cable mounting grips can be used for braiding cables or hoses very easily after they have already been laid and at any desired point of the outer cable jacket. The advantage of these grips is that cables that have already been connected do not have to be disconnected in order to attach the traction-relieving device.

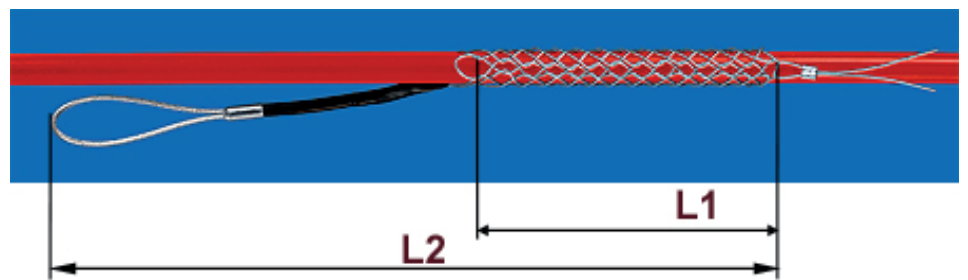

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
M 6/1/G	4 - 6	0,6	100	275
M 9/1/G	7 - 9	1,1	120	290
M 12/1/G	9 - 12	1,3	135	340
M 15/1/G	12 - 15	2,1	180	390
M 19/1/G	15 - 19	2,6	220	450
M 25/1/G	19 - 25	2,6	275	510
M 30/1/G	25 - 30	4,0	350	610
M 40/1/G	30 - 40	5,8	370	660
M 50/1/G	40 - 50	8,0	490	800
M 60/1/G	50 - 60	8,0	500	810
M 70/1/G	60 - 70	10,6	520	860
M 90/1/G	70 - 90	13,9	580	950
M 110/1/G	90 - 110	17,4	650	1130

INTERESTED? MAIL US AT [INFO@CABLECONNECTION.NL](mailto:INFO@CABLECONNECTION.NL)