



3G


## HOSE SECURING GRIPS with 2 side eyelets and 2 integrated thimbles (DIN)

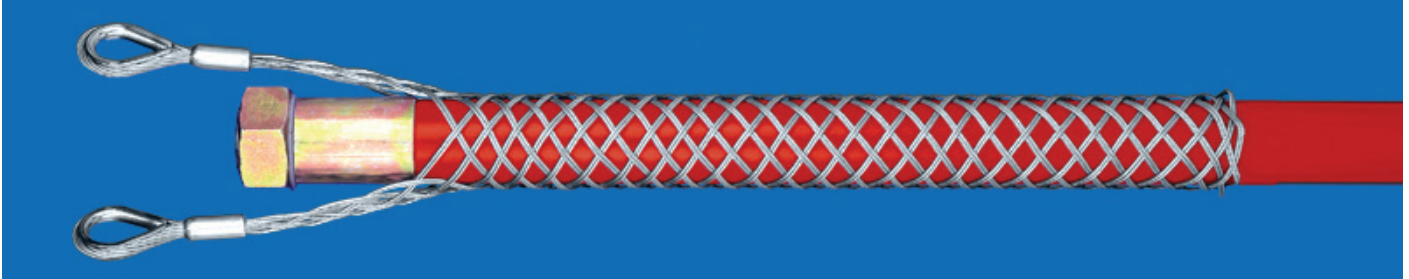

One cannot rule out the possibility that high-pressure hoses become loosened from their connection fittings and cause large damage and severe injury due to the high amount of abruptly released energy. Hose securing grips prevent such dangers.

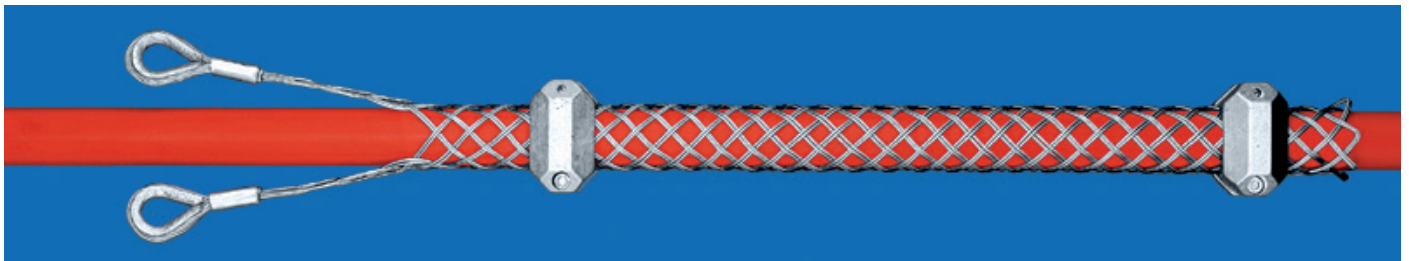

Designation	Cable diameter (mm)	Permissible workload with a 3 times higher security load (kN)	Mesh length, dimension L1, approx. (mm)	Total length dimension L2, approx. (mm)
S 10/2	6 - 10	2,2	600	740
S 15/2	10 - 15	3,4	600	740
S 20/2	15 - 20	6,8	600	780
S 25/2	20 - 25	6,8	600	800
S 30/2	25 - 30	8,1	600	800
S 40/2	30 - 40	11,7	600	820
S 50/2	40 - 50	16,0	600	850
S 60/2	50 - 60	16,0	600	880
S 70/2	60 - 70	21,3	600	930
S 90/2	70 - 90	27,9	600	960
S 110/2	90 - 110	34,9	600	1000

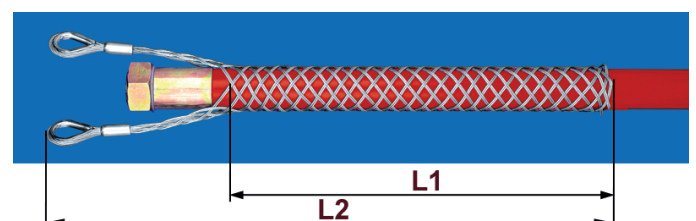

INTERESTED? MAIL US AT [INFO@CABLECONNECTION.NL](mailto:INFO@CABLECONNECTION.NL)